


JustiFix® II JM

SIHGA®



JustiFix® II JM
the original

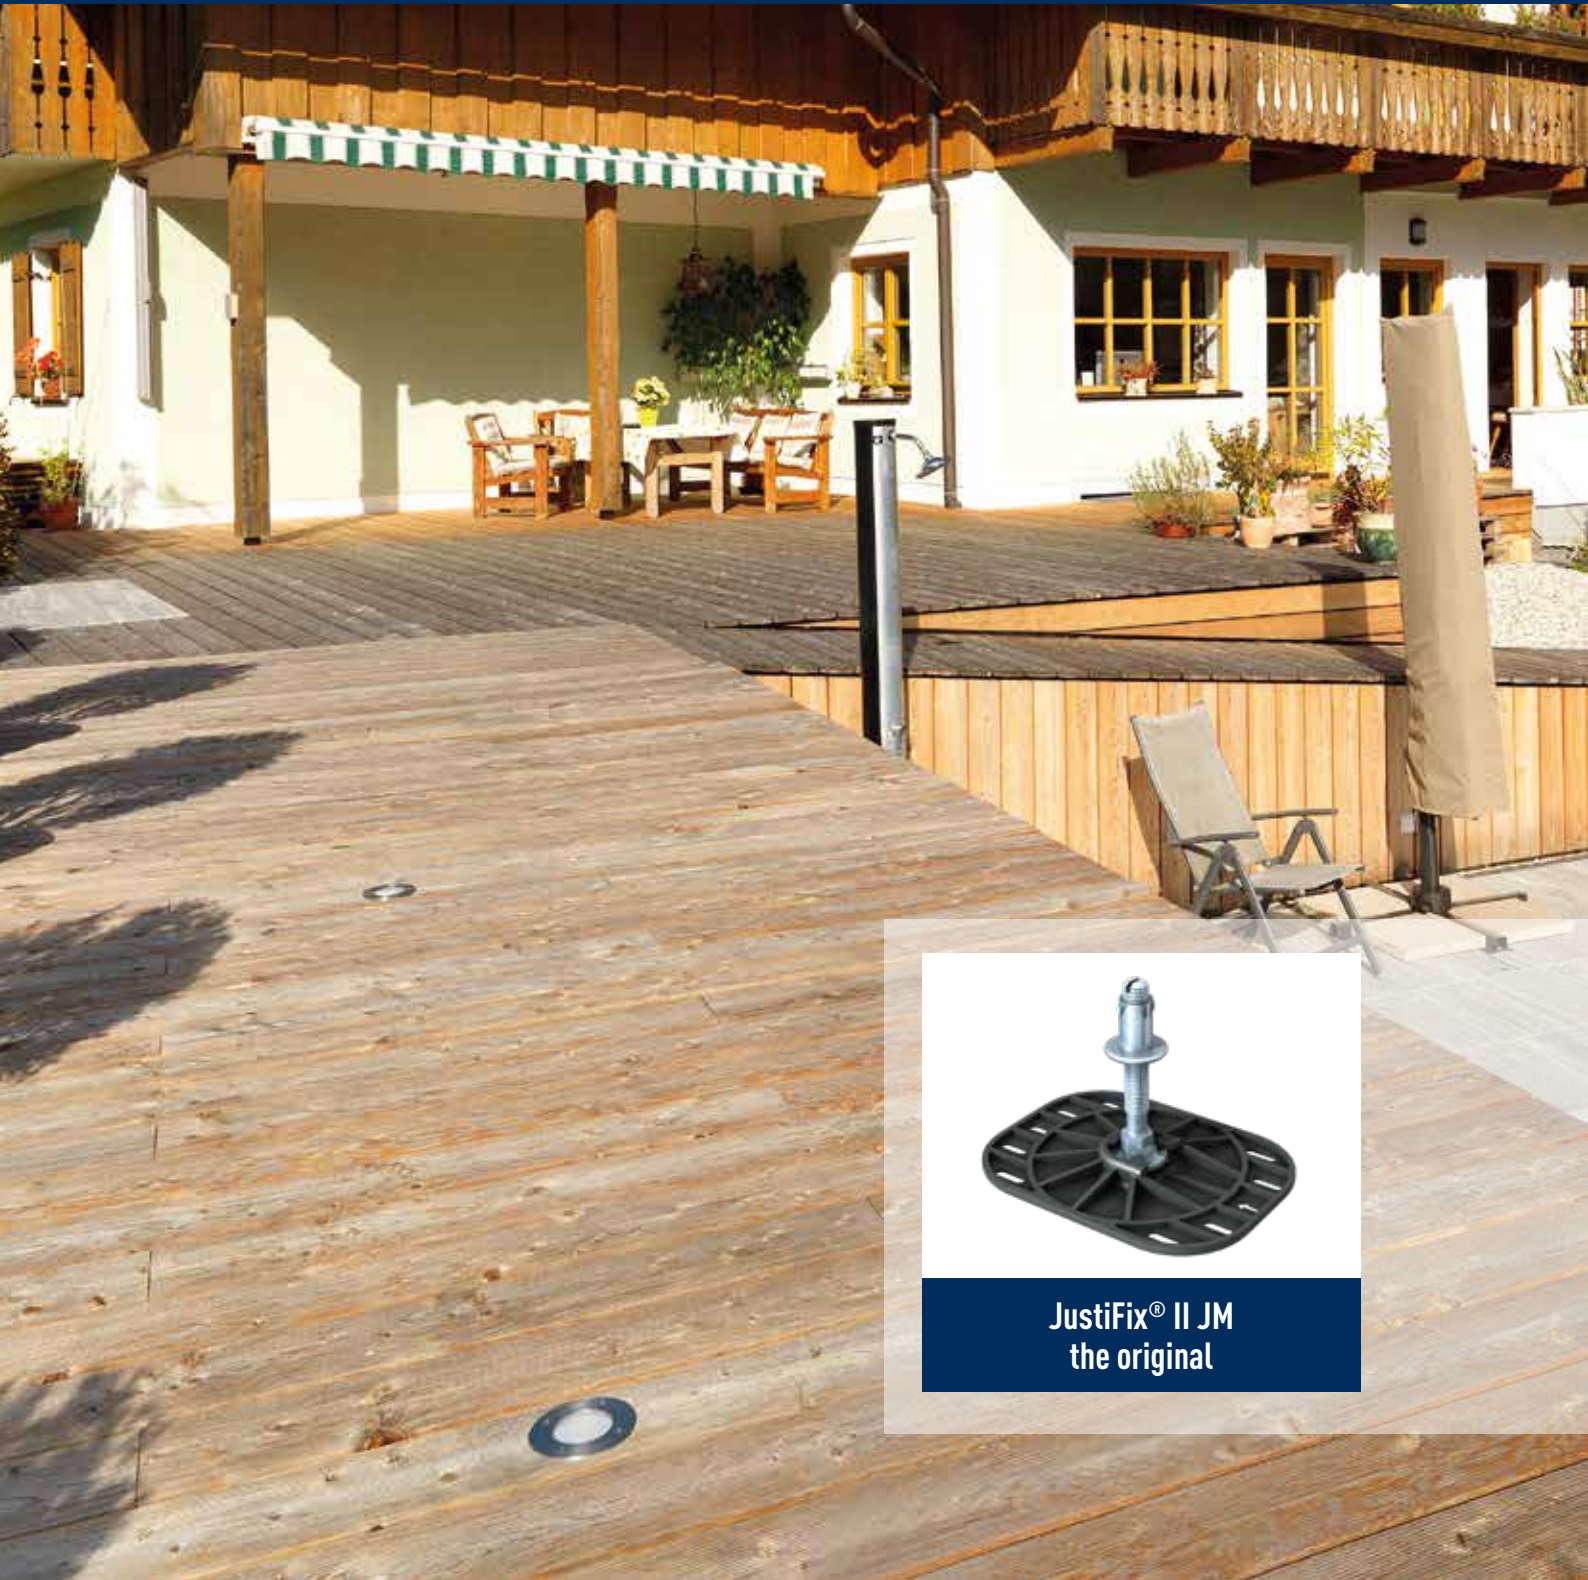

SIHGA® Feature

height-adjustable distance from 25 to 80 mm between substructure (with the exception of TefaFix® T) and foundation

developed, patented and made in Austria

only for solid foundations, paving, concrete, ... (not on insulating materials or flat roof insulation)

articulated mounting of the base plate

minimises vibrations

load capacity per piece 1.20 kN

slot pattern in the header and nuts in the footer

YOUR Benefit

this adjustable foot saves up to 50 % working time compared to individual solutions, the substructure remains dry and the terrace breathes

local quality, experience from more than 14 years of terrace construction included

versatile, only three models for the entire range


compensates for floor unevenness

increases walking comfort on the terrace

quantity calculation: approx. 4 units/m²

easy height adjustment from above with screwdriver or with open-end spanner SW 10 from below

SIHGA®		Dimension	Adjustment Range		Dimensions/ Base plate		Required Substructure
montagepack		JustiFix® II JM	[mm]		[mm]		[mm]
Art. No.	PU	Type	from	to	Length	Width	min.
40846	40	JM 40	25	40	100	74	25
40866	40	JM 60	25	60	100	74	45
40886	40	JM 80	25	80	100	74	65

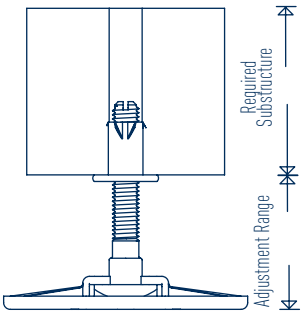

SIHGA® TIP:

Drill substructure with Ø 10 mm. Note design recommendations (page 64).

